

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
**WO 2004/042164 A1**

(51) International Patent Classification<sup>7</sup>: E04D 13/03

(21) International Application Number:  
PCT/AU2003/001481

(22) International Filing Date:  
10 November 2003 (10.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002952574 8 November 2002 (08.11.2002) AU

CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: FOOKS, Rodric, Lindsay [AU/AU]; 59 Wellington Street, Riverstone, NSW 2765 (AU).

(74) Agent: DUMMER, Peter, C.; Wallington-Dummer, GPO Box 3888, Sydney, NSW 2001 (AU).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SKYLIGHT SYSTEM

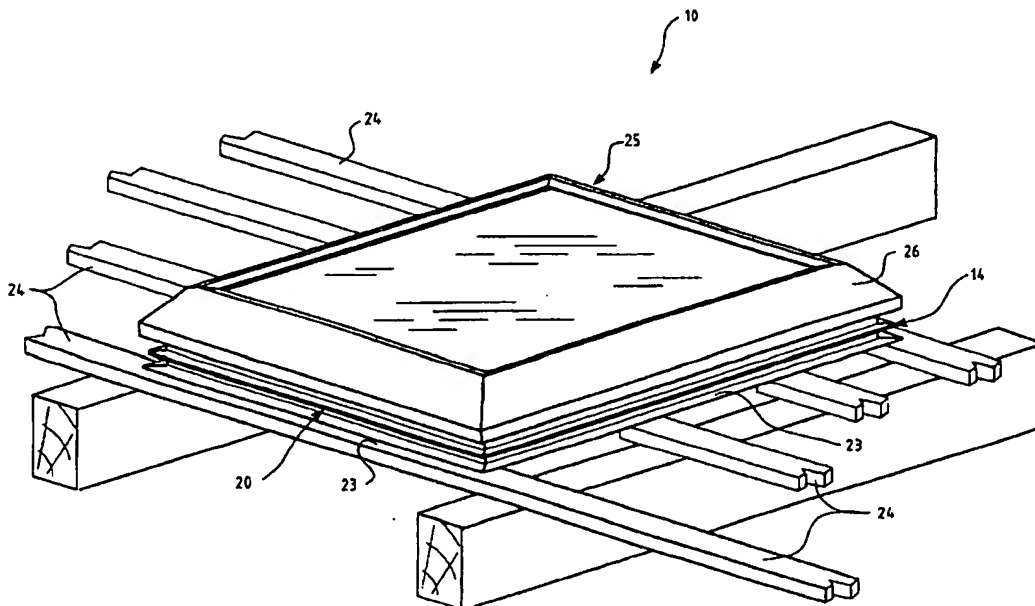

(57) Abstract: A skylight system (10) including a prefabricated mounting frame (20) and a prefabricated hood assembly (25), adapted to assemble together to form a skylight (10).

SKYLIGHT SYSTEM

The present invention relates to skylights adapted to be fitted to the roofs of buildings and, more particularly, to methods of construction and fitting of such skylights.

5

**BACKGROUND**

Skylights, let into roofing, have long been used to provide a source of light into the interior of a building. Skylights may be fixed or openable and may be adapted to provide ventilation as well as light. Skylights known in the industry suffer from a number of disadvantages.

At least some commonly available skylights of overseas manufacture may not conform to required standards of traficability, that is of being capable of supporting the weight of a person traversing the skylight, both in the strength of glass employed and the strength of frame construction.

Another problem commonly encountered in skylights intended to allow ventilation is that they do not adequately prevent the ingress of debris and in particular may not be proof against flying embers.

In addition, many available skylights require considerable on-site fabrication and are time consuming to install.

It is an object of the present invention to address or ameliorate at least some of the above disadvantages.

#### BRIEF DESCRIPTION OF INVENTION

5. Accordingly, in one broad form of the invention there is provided a skylight system including a prefabricated mounting frame and a prefabricated hood assembly, adapted to assemble together to form a skylight.

Preferably said prefabricated mounting frame comprises  
10 a rectangular arrangement of extruded sections.

Preferably said extruded sections are provided with bottom flange portions adapted to seat on the batten timbers of a sloping roof.

Preferably said extruded sections are provided with a  
15 pair of closely spaced projecting flanges adapted to accept and retain pre-assembled flashing elements attached to said extruded sections.

Preferably said flashing elements along the two sloping sides of said skylight, comprise roll-formed metal  
20 strips, said roll-formed strips adapted to interface with roof covering material.

Preferably said flashing elements along the two horizontal sides of said skylight comprise malleable metal strips.

Preferably said prefabricated mounting frame is provided with sprung retainer elements attached to each of the extruded elements forming the sides of said rectangular support structure.

5        Preferably said sprung retainer elements are in the form of bent metal strips with the lower ends of said strips forming an angle with said sides of said rectangular support structure, such that said lower ends deflect inwardly from said sides.

10       Preferably said extruded members are provided with an horizontal ledge extending outwardly from said extruded members, said horizontal ledge adapted to support a sealing strip, said sealing strip forming a perimeter seal around the top of said prefabricated mounting frame.

15       Preferably said prefabricated hood assembly includes perimeter capping, glass layers, internal sash frame, extruded seal elements and extruded clamping members.

         Preferably said perimeter capping is fabricated from extruded elements adapted to provide framing of said glass  
20 layers and support for said clamping members.

         Preferably said internal sash frame is retained within said perimeter capping by said clamping members, said clamping members provided with a clamping ledge adapted to

engage in grooves provided in the outer faces of said internal sash frame.

Preferably said extruded seal elements provide support for said glass layers.

- 5        Preferably said glass layers are clamped between said perimeter capping, said extruded seal elements and said internal sash frame by said clamping members.

Preferably said clamping members are fastened to said perimeter capping by self tapping screws.

- 10       Preferably said prefabricated hood assembly is adapted for assembly with said prefabricated mounting frame so that said internal sash frame locates within said prefabricated mounting frame; said clamping members seating on said perimeter seal.

- 15       Preferably said prefabricated hood assembly is retained in sealing engagement with said prefabricated mounting frame by means of said sprung retainer elements engaging in recesses provided in the outer surfaces of said internal sash frame.

- 20       Preferably said prefabricated mounting frame is provided with an extruded hinge section; said hinge section adapted to be a clip-on attachment to one of said extruded sections of said prefabricated mounting frame.

Preferably said hinge section includes an extruded lobe element, said lobe element being of substantially circular section and further including a convex extruded arcuate guide segment concentric with said lobe element.

5        Preferably at least one of said extruded elements of said perimeter capping of said prefabricated hood assembly includes an extruded hinge element of partially cylindrical form and a concave extruded arcuate guide segment concentric with said hinge element, said hinge element and  
10 said concave extruded arcuate guide segment adapted to mate with said lobe element and said convex extruded arcuate guide segment so as to allow rotation of said prefabricated hood assembly about said lobe element when one of said extruded hinge elements of said perimeter capping is  
15 assembled with said lobe element.

Preferably the degree of rotation of said prefabricated hood assembly is controlled by a latching mechanism within the limits of rotation allowed by said extruded lobe element, said extruded hinge element and said  
20 arcuate guide segments.

Preferably said prefabricated hood assembly is provided along one side of said perimeter capping with a raised cowling, said cowling provided with an opening facing out over said glass layers.

Preferably said cowling is provided with a hinged flap, said flap adapted to provide closure means for said opening.

Preferably said hinged flap is provided with extruded  
5 element along its upper edge adapted to mate with extruded element at the upper edge of said opening of said cowling, so as to allow said hinged flap to rotate between a first open and a second closed position.

Preferably the status of said hinged flap is changed  
10 from closed to open by means of the outstroke of a solenoid actuator.

Preferably the status of said flap is changed from open to closed by means of the instroke of said solenoid actuator and a return spring.

15 Preferably said cowling houses an electrically driven exhaust fan assembly.

Preferably said extruded seal element is of the form of an extruded strip, said strip provided with a plurality of co-extruded ridges on a first side of said strip and a  
20 projecting co-extruded tongue on an opposite side of said strip.

Preferably said co-extruded ridges are broached at intervals by a post-extruding operation to allow the passage of water condensate.

Preferably said extruded strip is provided with through holes, punched through said strip in a post-extruding operation to allow the egress of water condensate.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described with reference to the accompanying drawings wherein:

10        Figure 1 is a perspective view of the a skylight system according to a first preferred embodiment of the invention,

Figure 2 is a sectioned view of the higher end portion of the skylight system of figure 1,

15        Figure 3 is a sectioned view of the higher end portion of figure 2 and the opposite lower end portion of the skylight system of figures 1 and 2,

Figure 4 is a perspective view of a prefabricated mounting frame of the skylight system of figure 1.

20        Figure 5 is a part side section view of a second preferred embodiment of a skylight system according to the invention in a first, closed position,

Figure 6 is a part side section view of the embodiment of figure 6 in a second, opened position,



Figure 7 is a perspective view of a third preferred embodiment of the invention,

Figure 8 is a part side section view of the embodiment of figure 7 in a first, open position,

5 Figure 9 is a part side section view of the embodiment of figure 7 in a second, closed position,

Figure 10A to 10C are perspective views of a preferred embodiment of a component of the skylight system of the invention, and

10 Fig. 11 illustrates a preferred embodiment of the skylight system with flashing elements interposed with roof tiles.

Figure 12 illustrates a preferred embodiment of the skylight system adapted for installation to a corrugated  
15 metal roof.

#### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

##### **First Preferred Embodiment**

20 A first preferred embodiment of a skylight system 10 according to the invention will now be described with reference to figures 1 to 4. A prefabricated mounting frame 20 is constructed from extruded sections 21 to form a generally rectangular support structure 22 as may best be  
25 seen in figure 4, and is provided with bottom flange 23

adapted to rest on the batten timbers 24 of a roof as shown in figure 1. The upper edge of extruded section 21 is provided with a horizontal top ledge 41 adapted to accept sealing strip 44.

5 Extruded section 21 is further provided with projecting flanges 14 adapted to receive flashing elements 15, 16 and 16A as shown in figure 4. Flashing elements 15, 16 and 16A are pre-assembled with rectangular support structure 22 by crimping flashing 15, 16 and 16A between  
10 the projecting flanges 14 so as to allow integration of the flashing with roofing material such as tiles when installing the skylight system 10.

In at least one preferred embodiment of the invention a silicon or other suitable sealant 52 is introduced into  
15 the space between the flanges 14 prior to fully inserting the flashing 15, 16 and 16A. In this process, the flashing is firstly inserted a short distance into the flanges and the sealant injected through a series of pre-drilled holes  
51 from the inside of the frame as shown in the inset of  
20 figure 2. Optionally, overlapping portions of flashing elements 15, 16 and 16A extending outwardly from the support structure may be fastened together by any suitable means including rivets, welding and the TOX® fastening system.

In a preferred embodiment of flashing 15 adapted for use along the two sloping sides 17 of skylight system 10, flashing 15 is fashioned out of malleable metal sheeting roll-formed to a profile adapted to suit the configuration of roofing material as shown in figure 1A. Flashing along the upper and lower horizontal edges 18 and 19 of skylight system 10 is fashioned from conventional malleable flat sheeting.

In this first preferred embodiment, a prefabricated hood assembly 25 comprises a perimeter capping 26 formed of extruded elements 27 and internal sash frame members 28 forming a rectangular sash frame 29 within perimeter capping 26. The sections of sash frame members 28, along the two sloping sides and the high side of the frame are formed with raised portions 50 which act to nest glass layers 30 around three sides of the glass.

Glass layers 30 are held in a clamped position between perimeter capping 26 and sash frame 29 by means of clamping member 31. Clamping member 31 is provided with clamping ledge 32 which engages groove 33 of sash frame 29. Self-tapping screws 34 pass through holes 35 in clamping member 31 to engage with a projecting member 36 of extruded element 27.

In this instance, glass layers 30 are supported on extruded seal element 38 held in place by extruded tongue 43 located in groove 37 of sash frame member 28. As shown in figure 3 glass layers 30 are further supported at the lower end of perimeter capping 26 by extruded buffer 47.

As explained in more detail below, extruded seal element 38 underlying the lower edge of glass layers 30 is provided with channels as shown in figures 10B and 10C through ridges 46 so as to allow condensation collecting on the underside of the lower glass panel to flow downwardly to pass through these channels and drain through holes 48 and mating holes 45 in clamping member 31.

Rectangular support structure 22 is provided along each of its four sides with sprung retainer elements 39, attached to the extruded sections 21 by fasteners 40. As can be seen in figure 2, retainer elements 39 are so constructed as to engage in recess grooves 41 of sash frame 29.

It will be clear that with suitably sized components, prefabricated hood assembly 25 may be inserted into rectangular support structure 22 so that initially sprung retainer elements 39 will be deflected to allow the sash frame 28 to enter rectangular support structure 22 to a point where clamping members 31 are seated on sealing strip

44 and retainer elements 39 deflect inwardly to engage recess grooves 41 so as to lock sash frame 29 in position.

The angled sections of retainer elements 39 are provided with slots 43 as can be seen in figure 3. Should  
5 removal of prefabricated hood assembly 25 be required, access holes may be drilled through extruded sections 21 opposite the slots 43 so that, with a suitable tool, sprung retaining elements 39 may be pulled outwardly to disengage from recess grooves 41.

10 The method of construction of this first embodiment of the present invention, allows access to the internal surfaces of rectangular support structure 22 for the purpose of strapping support structure 22 to structural supporting members of the roof to which the skylight is to  
15 be installed.

With reference to figure 11, a typical installation of skylight system 10 shows the disposition of flashing elements 15, 16 and 16A interposed with roof tiles 49 (shown as dashed lines). At upper horizontal side 18, flat  
20 malleable flashing 16 lies under the row of roof tile 49a, while at lower horizontal side 19 flashing 16A overlies the row of roof tile 49e. Roll formed flashing 15 remains below roof tiles 49a, 49b, 49c and 49d but is deformed at approximate position 'A' to deflect upwardly to emerge

between roof tiles 49d and 49e and overlying roof tile 49e. Note that the inner edge of roll-formed flashing 15 remains crimped between projecting flanges 14.

In at least one preferred embodiment of the invention the flashing elements 15, 16 and 16A are formed of "O" tempered aluminium sheet. This material is malleable but cannot be stretched during installation on site. For this reason the flashing 16A extending from the lower end 19 of support structure 22 is prepared prior to assembly by the pressing of corrugations or flutings 55 along its lower edge and extending approximately half the width of the sheet comprising the flashing element as shown in the inset of figure 11. Preferably a pressed-in indentation 56 is formed substantially along the length of the flashing to minimise distortion of the flat edge portion to be inserted into the flange portions of the frame 22.

This corrugating or fluting process in effect provides additional material along the lower edge of the flashing element. This additional material allows for the conforming of the lower portion of the flashing to the profile of the tiles by tamping blows with a suitable mallet.

Thus installation time is minimized by the ability to install rectangular support structure 22 and attached flashing elements 15, 16 and 16A and the simple insertion

of the prefabricated hood assembly 25 once the rectangular support structure 22 is fixed in position.

#### **Second Preferred Embodiment**

5        A second preferred embodiment of a skylight system according to the invention will now be described with reference to figures 5 and 6 wherein like elements of the first embodiment are similarly numbered but with the addition of 100 so that for example feature 22 of the first  
10        embodiment is referenced as feature 122 in the second embodiment.

Accordingly there is provided a rectangular support structure 122 fabricated from extruded sections 121 and provided with flange elements 123 to allow structure 122 to  
15        be positioned on roof battens 124. As for the first embodiment already described, the extruded sides of structure 122 are provided with projecting flanges 114 to allow the pre-assembly of flashing (not shown) along the two sloping sides of skylight system 100 and conventional  
20        malleable flat flashing 115 along the upper and lower horizontal sides.

Extruded sections 121 in this embodiment are so formed as to allow the clip-on attachment of an extruded hinge section 143. Preferably hinge section 143 will be attached

to the upper horizontal side of structure 122. Hinge section 143 is provided with an extruded hinge lobe 144 and arcuate guide section 145.

In this second preferred embodiment perimeter capping 5 126 is provided with extruded hinge trough 146 and extruded arcuate guide follower 147. Prefabricated hood assembly 125 includes upper sash frame 129 which clamps glass layers 130 against perimeter capping 126 by means of clamping member 131 and self-tapping screws 134.

10 With reference to figure 6 it will be observed that prefabricated hood assembly 125 may be rotated into an open position relative to rectangular support structure 122 about extruded hinge lobe 144. Prefabricated hood assembly 125 is constrained to rotate about extruded hinge lobe 144 15 as long as extruded arcuate guide follower 147 remains in contact with arcuate guide section 145. This contact may be maintained by restricting the opening of prefabricated hood assembly 125 with a suitable latching mechanism (not shown) such as commonly found on hinged sash windows.

20 For installation of this second embodiment of the invention, the rectangular support structure 122 is firstly positioned and fastened to the roof structural members as was the case for the first embodiment described above. Prefabricated hood assembly 125 is then hooked into



position with hinge trough 146 around hinge lobe 144 and rotated to its closed position. In use the aforementioned latching mechanism allows the opening of the hood assembly as desired.

5

### **Third Preferred Embodiment**

A third preferred embodiment of a skylight system according to the invention will now be described with reference to figures 7 wherein like elements of the first and second embodiments are similarly numbered but with the addition of 200 so that for example feature 22 of the first embodiment and 122 of the second embodiment is referenced as feature 222 in this third embodiment.

Accordingly, in figure 7 rectangular support structure 222 is located on roof battens 224 as before resting on flange elements 223. In this embodiment prefabricated hood assembly 225 is provided with cowling 250. Cowling 250 is provided with opening 251 and hinged flap 252.

As shown in figure 8, hinged flap 252 is hinged by means of hinge arrangement 258 wherein extruded element 259 of cowling 250 is so formed as to provided rotational support for mating extruded element 260 of hinged flap 252.

Again with reference to figure 8, contained in cowling 250 is motor and fan assembly 260 where barrel fan 253

extends parallel to opening 251 of cowling 250 with fan motor 254 located at one end of the fan. When in ventilating mode, solenoid 255 outstrokes rod 258 to force flap 252 into its open position and barrel fan motor is  
5 switched on. Barrel fan 253 now acts to draw air from building interior 257 and expel it through opening 251. When not in ventilating mode, barrel fan motor is switched off and solenoid 255 retracts rod 258 allowing flap 252 to close under force from a return spring (not shown).

10

#### **Extruded Seal Element**

With reference to figures 3 and 10, extruded seal element 38 will now be more fully described. A problem with sealing elements of prior art is that these are generally  
15 injection moulded from elastomer material requiring specific moulds for every differently dimensioned skylight assembly. The method of seal manufacture here described overcomes this disadvantage.

In a first procedure profile 300 is extruded of  
20 indefinite length as desired from elastomeric material such as rubber, neoprene or the like as shown in figure 10A. In a subsequent operation ridges 301 are provided with drainage channels 302 either by mechanical milling or by

hot melt methods (figure 10B). Finally punched drainage holes 303 are provided at suitable intervals (figure 10C).

#### Fourth Preferred Embodiment

5 In a fourth preferred embodiment of the present invention, a system of flashing is adapted specifically to the fitting of any of the skylights described herein above to a corrugated metal roof.

As also described above, the rectangular support  
10 structure is pre-assembled with upper and lower and side flashing elements inserted into the extruded flanges and sealed with a suitable sealant. The arrangement is shown in figure 12.

As shown in figure 12 the pre-assembled flashing 316  
15 at the high side of the skylight 300 is joined to the metal of the corrugated roof 325 by means of corrugated flashing element 320. Flashing 316 in this embodiment is provided with an upwardly folded edge portion 330. Corrugated flashing element 320 is comprised of malleable aluminium  
20 sheet which is prepared with corrugations to match those of a corrugated metal roof along its higher edge 322 and provided with a fold over portion 321 at its lower edge 323 adapted to fit over upwardly folded edge portion 330. The corrugated edge 322 may be placed over the sheeting of roof

325 with suitable sealant as shown in figure 12 or positioned under it as shown in the inset of figure 12. Although shown in figure 12 as upwardly folded, edge portion 330 and 321 may be folded further as shown in the  
5 inset of figure 12 so as to lie flush against the surface of flashing element 316.

A similar arrangement is used to connect the lower end flashing element 316A to the sheeting of roof 325 with corrugated flashing element 340. Corrugated flashing  
10 element 340 is provided at its higher edge with fold over portion 341 adapted to mate with folded under portion 342 of the lower edge of flashing element 316A. The lower edge of corrugated flashing element 340 is prepared with corrugations to match those of the corrugated sheeting of  
15 roof 325.

It will be appreciated that the location of corrugated flashing elements 320 and 340 is determined by the corrugations of roof sheeting whereas the location of the skylight may be determined by the location of the  
20 timber structure of the roof. The fold over portions 321 with folded edge portion 330, and fold over portion 341 with folded edge portion 342 allows sideways adjustment of the connecting flashing elements and the pre-assembled skylight flashing.

The above describes only some embodiments of the present invention and modifications, obvious to those skilled in the art, can be made thereto without departing from the scope and spirit of the present invention.

**CLAIMS**

1. A skylight system including a prefabricated mounting frame and a prefabricated hood assembly, adapted to assemble together to form a skylight.
- 5 2. The skylight system of claim 1 wherein, said prefabricated mounting frame comprises a rectangular arrangement of extruded sections to form a rectangular support structure.
3. The skylight system of claim 2 wherein, said extruded  
10 sections are provided with bottom flange portions adapted to seat on the batten timbers of a sloping roof.
4. The skylight system of claim 2 wherein, said extruded  
15 sections are provided with a pair of closely spaced projecting flanges adapted to accept and retain pre-assembled flashing elements attached to said extruded sections.
5. The skylight system of claim 4 wherein, said flashing  
20 elements along the two sloping sides of said skylight, comprise roll-formed metal strips, said roll-formed strips adapted to interface with roof covering material.

6. The skylight system of claim 4 wherein, said flashing elements along the two horizontal sides of said skylight comprise malleable metal strips.
7. The skylight system of claim 2 wherein, said prefabricated mounting frame is provided with sprung retainer elements attached to each of the extruded elements forming the sides of said rectangular support structure.
8. The skylight system of claim 7 wherein, said sprung retainer elements are in the form of bent metal strips with the lower ends of said strips forming an angle with said sides of said rectangular support structure, such that said lower ends deflect inwardly from said sides.
9. The skylight system of claim 3 wherein said extruded members are provided with an horizontal ledge extending outwardly from said extruded members, said horizontal ledge adapted to support a sealing strip, said sealing strip forming a perimeter seal around the top of said prefabricated mounting frame.
10. The skylight system of claim 1 wherein, said prefabricated hood assembly includes perimeter capping, glass layers, internal sash frame, extruded seal elements and extruded clamping members.

11. The skylight system of claim 10 wherein, said perimeter capping is fabricated from extruded elements adapted to provide framing of said glass layers and support for said clamping members.
- 5 12. The skylight system of claim 11 wherein, said internal sash frame is retained within said perimeter capping by said clamping members, said clamping members provided with a clamping ledge adapted to engage in grooves provided in the outer faces of said internal  
10 sash frame.
13. The skylight system of claim 10 wherein, said extruded seal elements provide support for said glass layers.
14. The skylight system of claims 10 to 13 wherein, said glass layers are clamped between said perimeter  
15 capping, said extruded seal elements and said internal sash frame by said clamping members.
15. The skylight system of claim 14 wherein, said clamping members are fastened to said perimeter capping by self tapping screws.
- 20 16. The skylight system of any of claims 1 to 15 wherein, said prefabricated hood assembly is adapted for assembly with said prefabricated mounting frame so that said internal sash frame locates within said



prefabricated mounting frame; said clamping members seating on said perimeter seal.

17. The skylight system of claim 16 wherein, said prefabricated hood assembly is retained in sealing engagement with said prefabricated mounting frame by means of said sprung retainer elements engaging in recesses provided in the outer surfaces of said internal sash frame.

18. The skylight system of claim 15 wherein, said prefabricated mounting frame is provided with an extruded hinge section; said hinge section adapted to be a clip-on attachment to one of said extruded sections of said prefabricated mounting frame.

19. The skylight system of claim 18 wherein, said hinge section includes an extruded lobe element, said lobe element being of substantially circular section and further including a convex extruded arcuate guide segment concentric with said lobe element.

20. The skylight system of claim 19 wherein, at least one of said extruded elements of said perimeter capping of said prefabricated hood assembly includes an extruded hinge element of partially cylindrical form and a concave extruded arcuate guide segment concentric with said hinge element; said hinge element and said

concave extruded arcuate guide segment adapted to mate with said lobe element and said convex extruded arcuate guide segment so as to allow rotation of said prefabricated hood assembly about said lobe element when one of said extruded hinge elements of said perimeter capping is assembled with said lobe element.

21. The skylight system of claim 20 wherein, the degree of rotation of said prefabricated hood assembly is controlled by a latching mechanism within the limits of rotation allowed by said extruded lobe element, said extruded hinge element and said arcuate guide segments.

22. The skylight system of claim 15 wherein said prefabricated hood assembly is provided along one side of said perimeter capping with a raised cowling, said cowling provided with an opening facing out over said glass layers.

23. The skylight system of claim 22 wherein said cowling is provided with a hinged flap, said flap adapted to provide closure means for said opening.

24. The skylight system of claim 23 wherein, said hinged flap is provided with extruded element along its upper edge adapted to mate with extruded element at the upper edge of said opening of said cowling, so as to

allow said hinged flap to rotate between a first open and a second closed position.

25. The skylight system of claim 24 wherein, the status of said hinged flap is changed from closed to open by means of the outstroke of a solenoid actuator.

26. The skylight assembly of claim 24 wherein, the status of said flap is changed from open to closed by means of the instroke of said solenoid actuator and a return spring.

27. The skylight system of claim 23 wherein, said cowling houses an electrically driven exhaust fan assembly.

28. The skylight system of any of claims 1 to 26 wherein, said extruded seal element is of the form of an extruded strip, said strip provided with a plurality of co-extruded ridges on a first side of said strip and a projecting co-extruded tongue on an opposite side of said strip.

29. The skylight system of claim 28 wherein, said co-extruded ridges are broached at intervals by a post-extruding operation to allow the passage of water condensate.

30. The skylight system of claim 29 wherein, said extruded strip is provided with through holes, punched through

- 27 -

said strip in a post-extruding operation to allow the egress of water condensate.

31. The skylight system of claims 29 or 30 wherein said flashing elements are adapted to engage with corrugated flashing elements adapted to join said flashing elements to corrugated metal sheeting of a roof.
32. The skylight system of claims 29, 30 or 31 wherein said flashing elements are adapted to so engage with said corrugated flashing elements as to allow for sideways adjustment of said skylight relative to the location of corrugations of said metal sheeting.
33. The skylight system of any one of claims 29 to 32 wherein said flashing attached to the lower edge of said skylight is comprised of a sheet of malleable "0" tempered aluminium; said sheet provided along a lower edge with corrugations.
34. The skylight system of claim 33 wherein said corrugations provide an additional material along said edge; said material allowing for conformation to profiles of the tiles of a tiled roof.
35. A method for the installation of a skylight; said method including the steps of:

- 28 -

- (a) removal of sufficient tiles from a tiled roof to make an opening for the installation of a rectangular support structure,
- (b) Attaching said support structure to timber elements of said roof,
- 5 (c) arranging flashing elements pre-assembled to said rectangular support structure.
36. The method of claim 35 wherein a flashing element arranged along a higher edge of said skylight is arranged under a layer of tiles adjacent an upper edge of said opening.
- 10 37. The method of claims 35 or 36 wherein a flashing element arranged along a lower edge of said rectangular support structure is arranged over a layer of tiles adjacent a lower edge of said opening.
- 15 38. The method of claims 35, 36 or 37 wherein flashing elements arranged along each sloping side of said rectangular support structure are arranged to lie underneath adjoining tiles along a higher portion of each side of said opening; said flashing elements arranged so as to emerge from between said tiles so as to overlie a lower portion of each side of said opening.
- 20

**ABSTRACT**

A skylight system including a prefabricated mounting frame and a prefabricated hood assembly, adapted to assemble together to form a skylight.

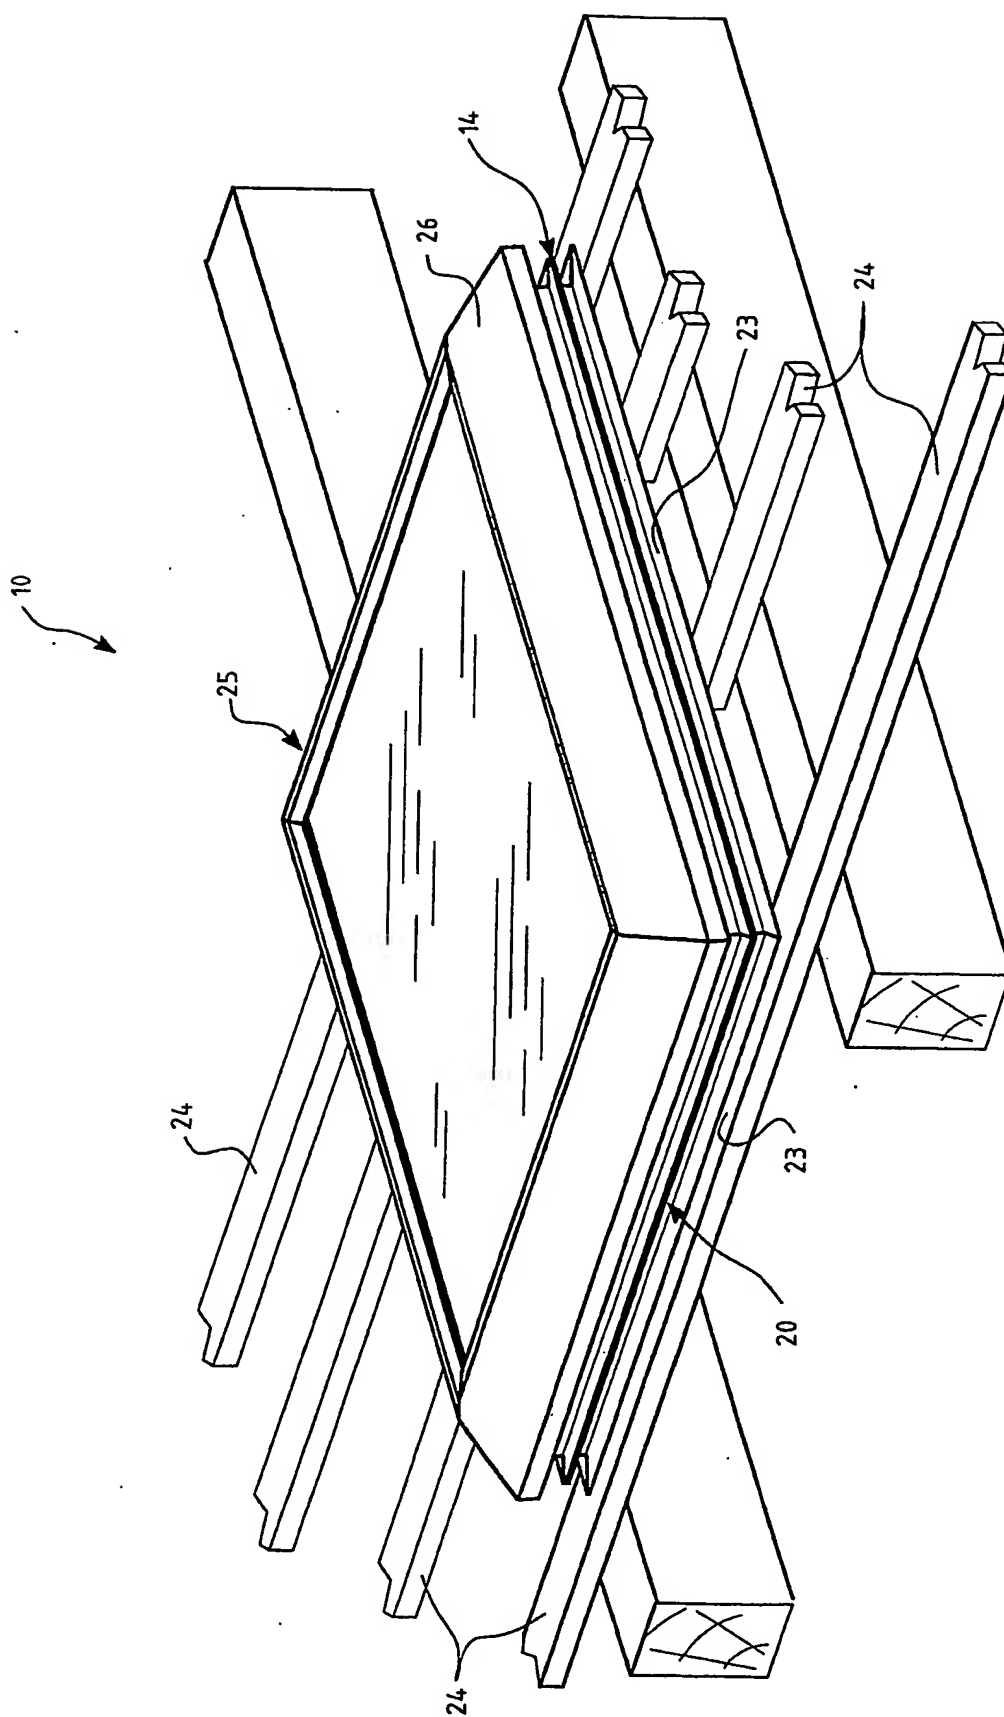


Fig. 1

10/534189

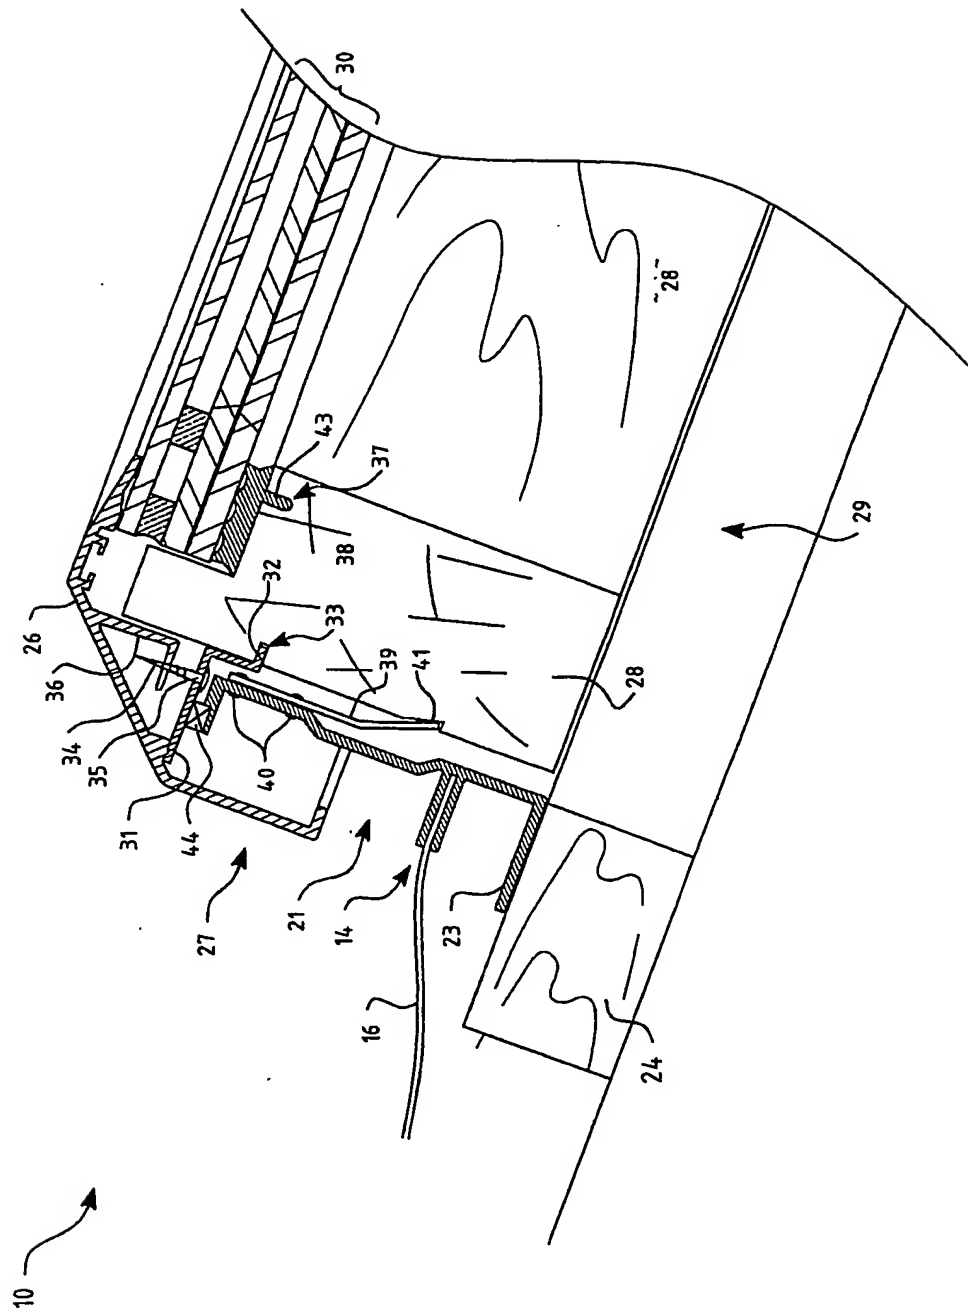
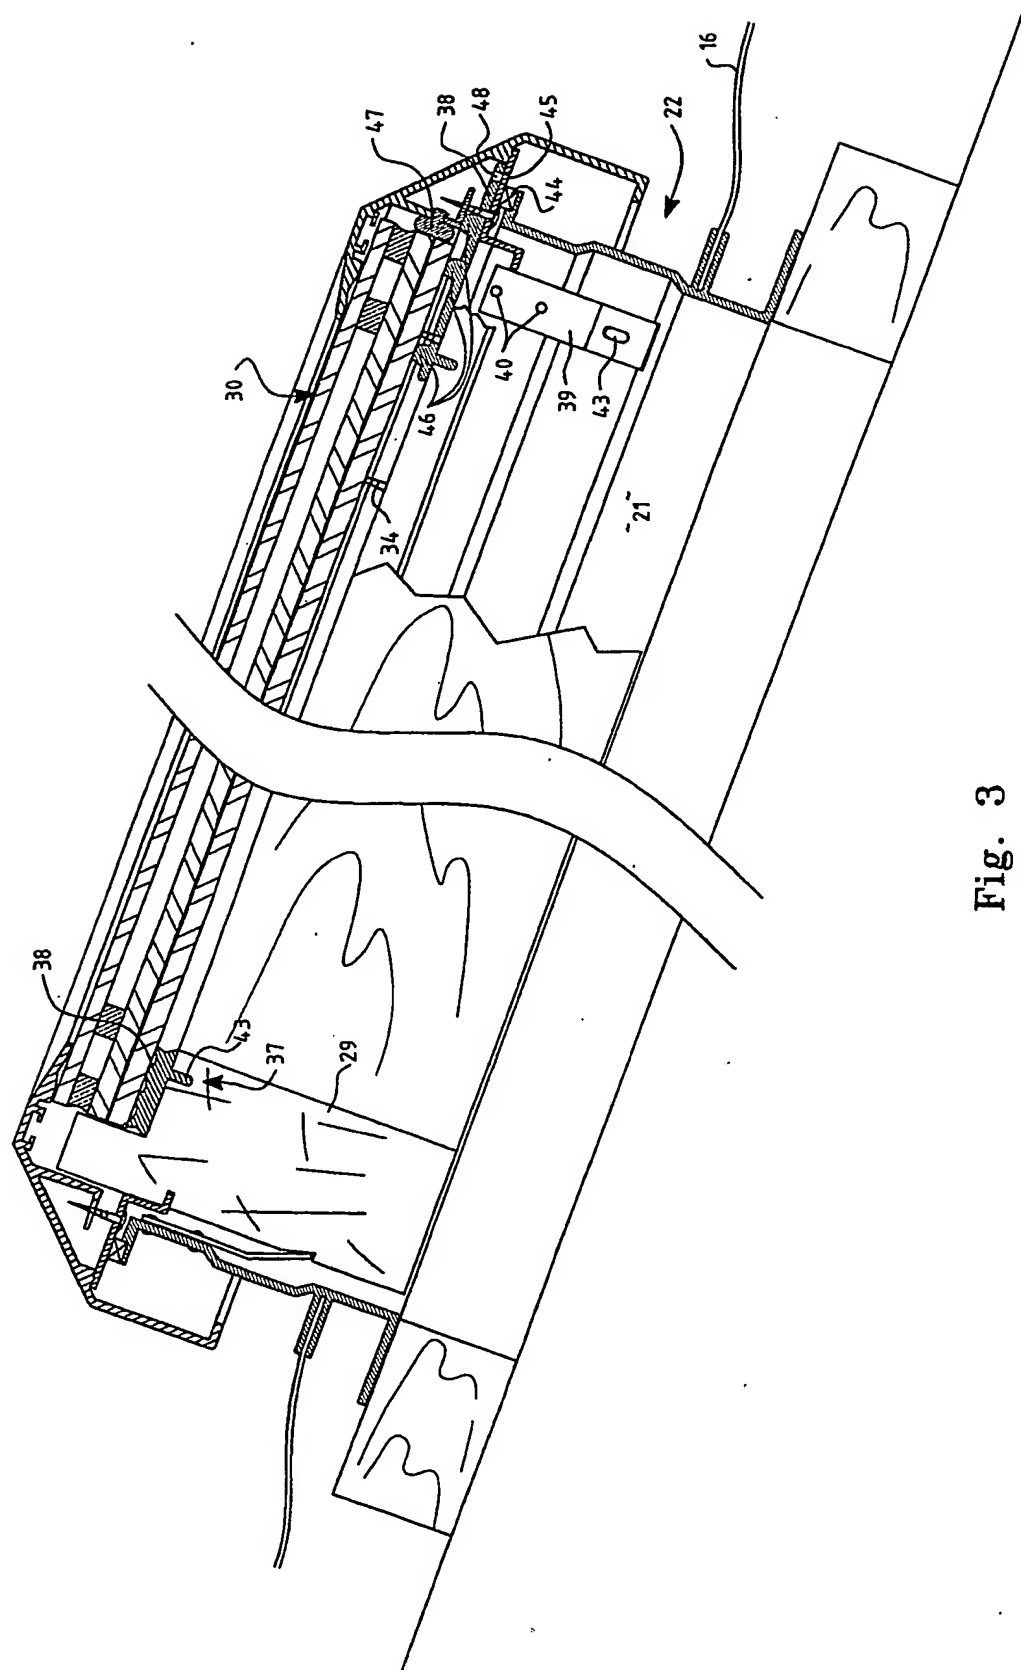


Fig. 2





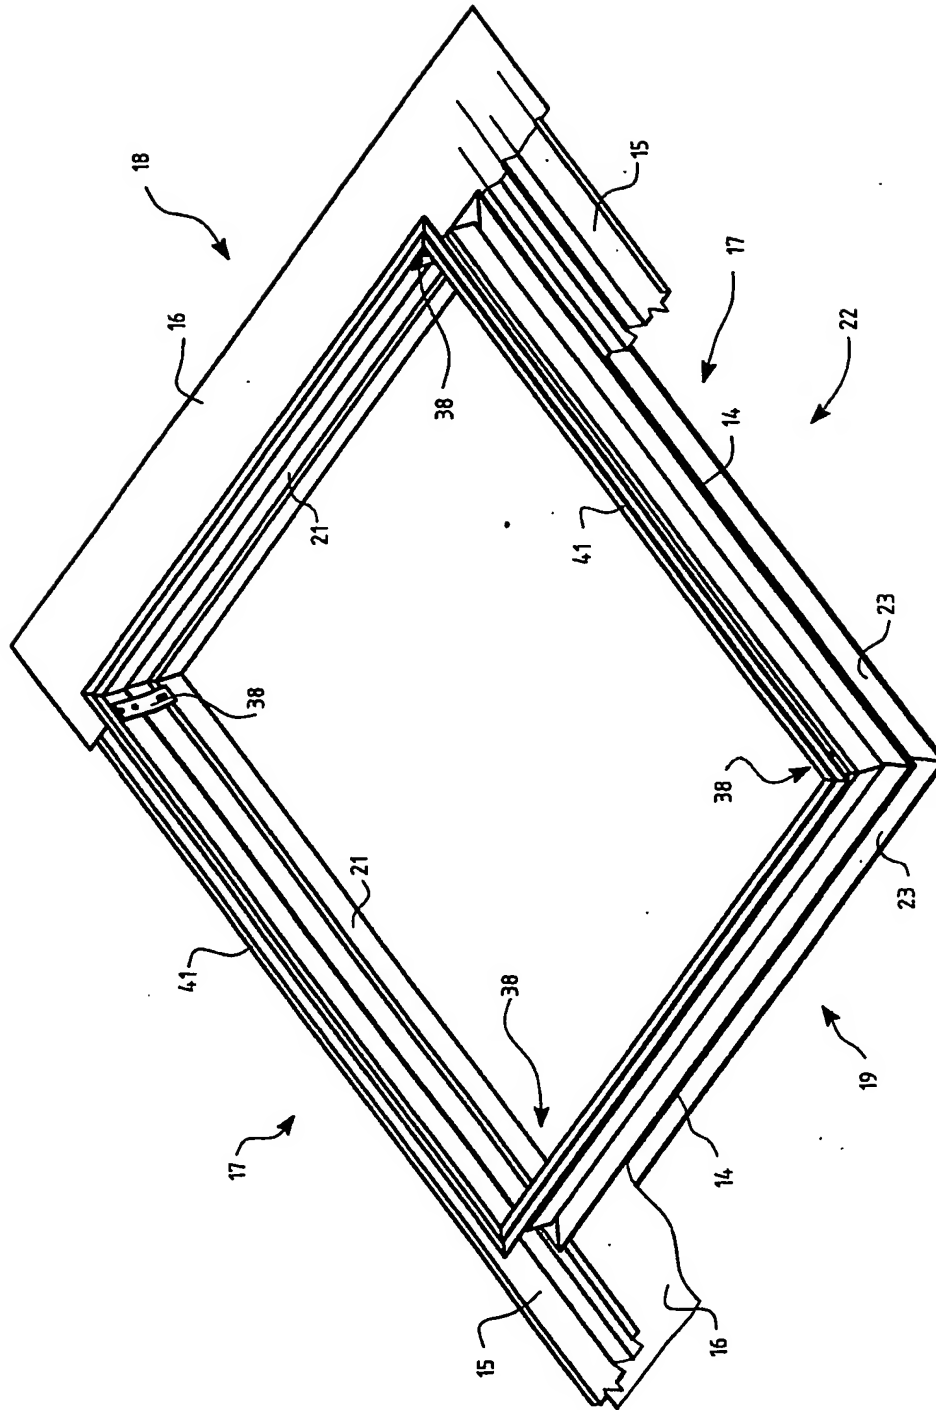


Fig. 4

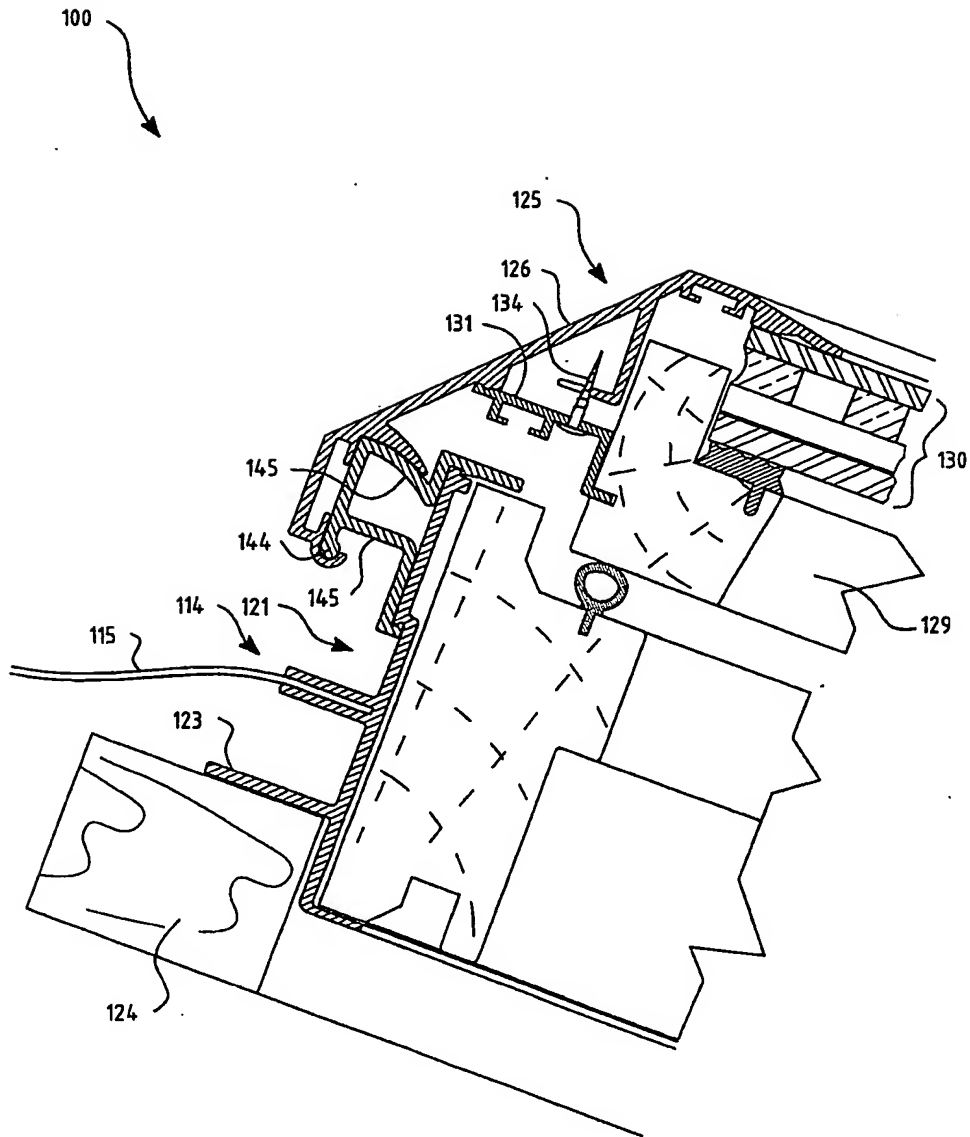


Fig. 5

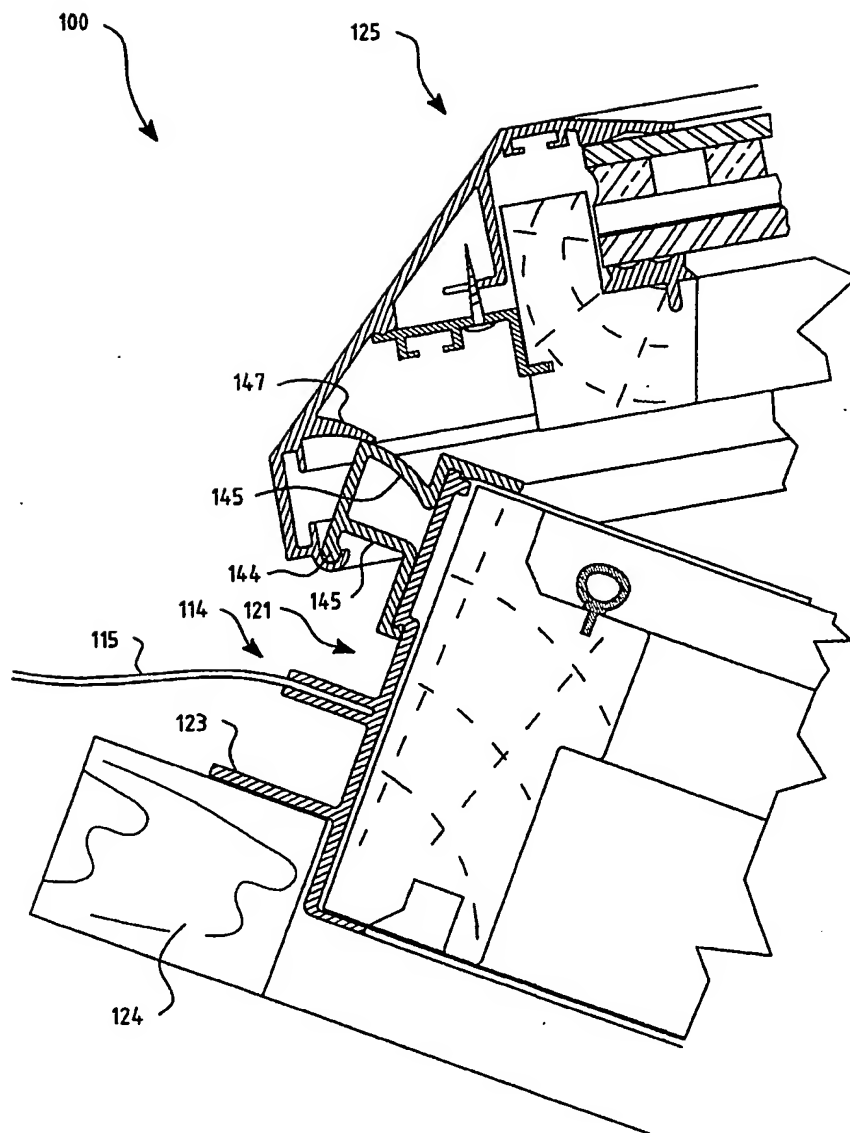
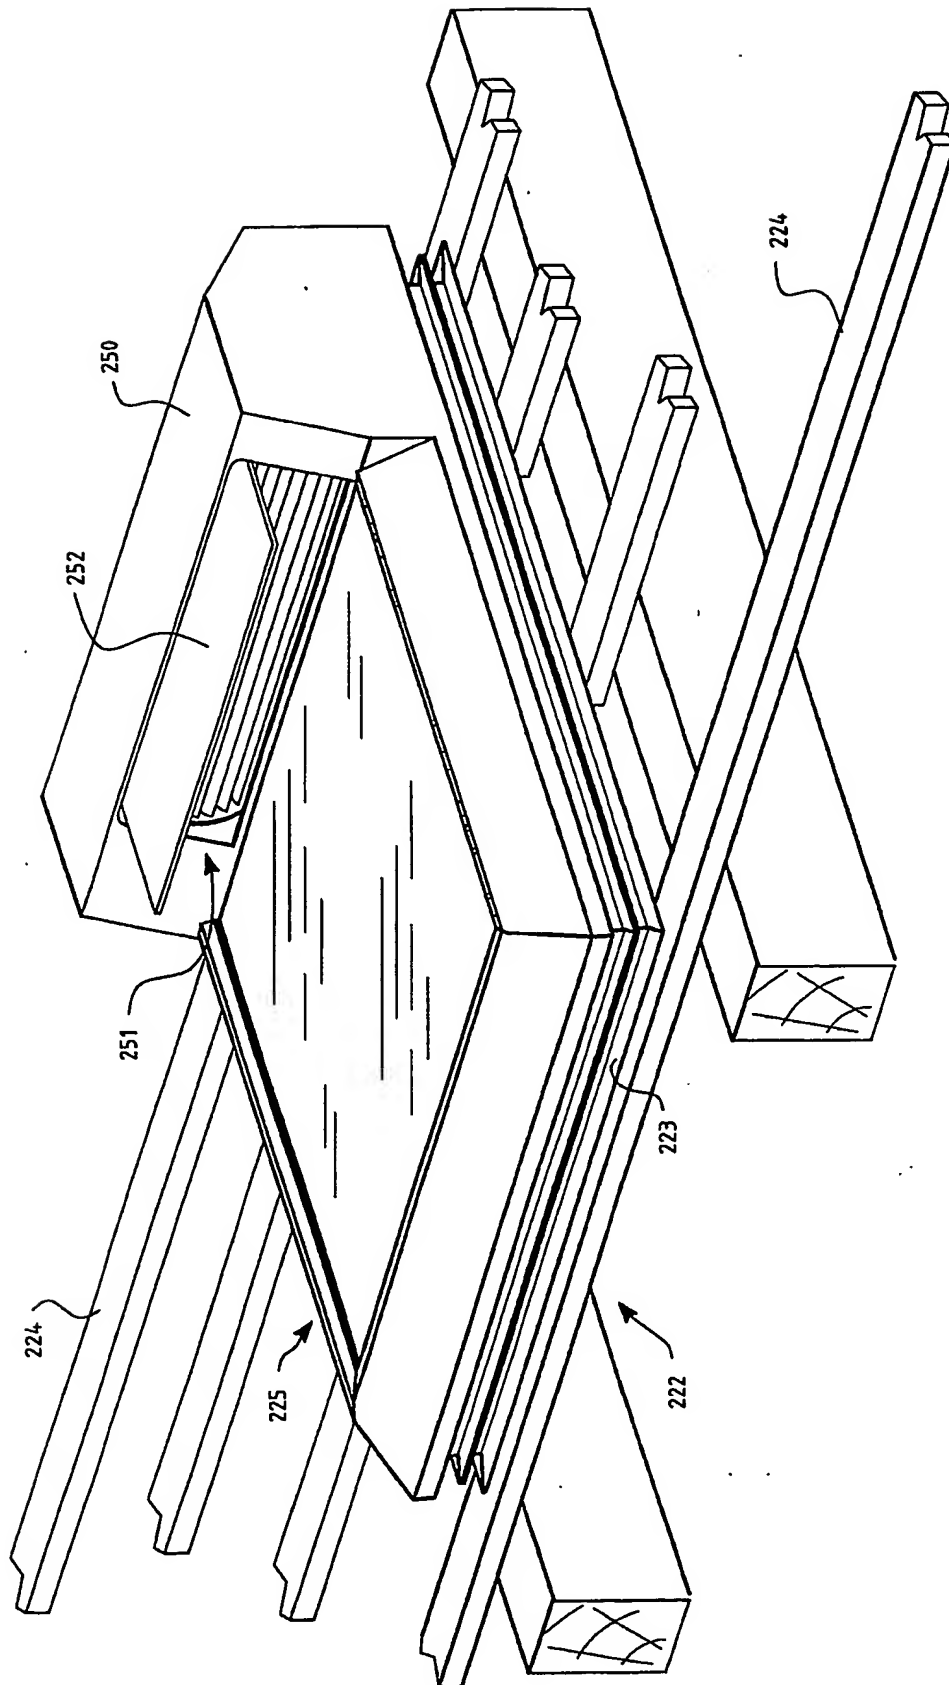


Fig. 6



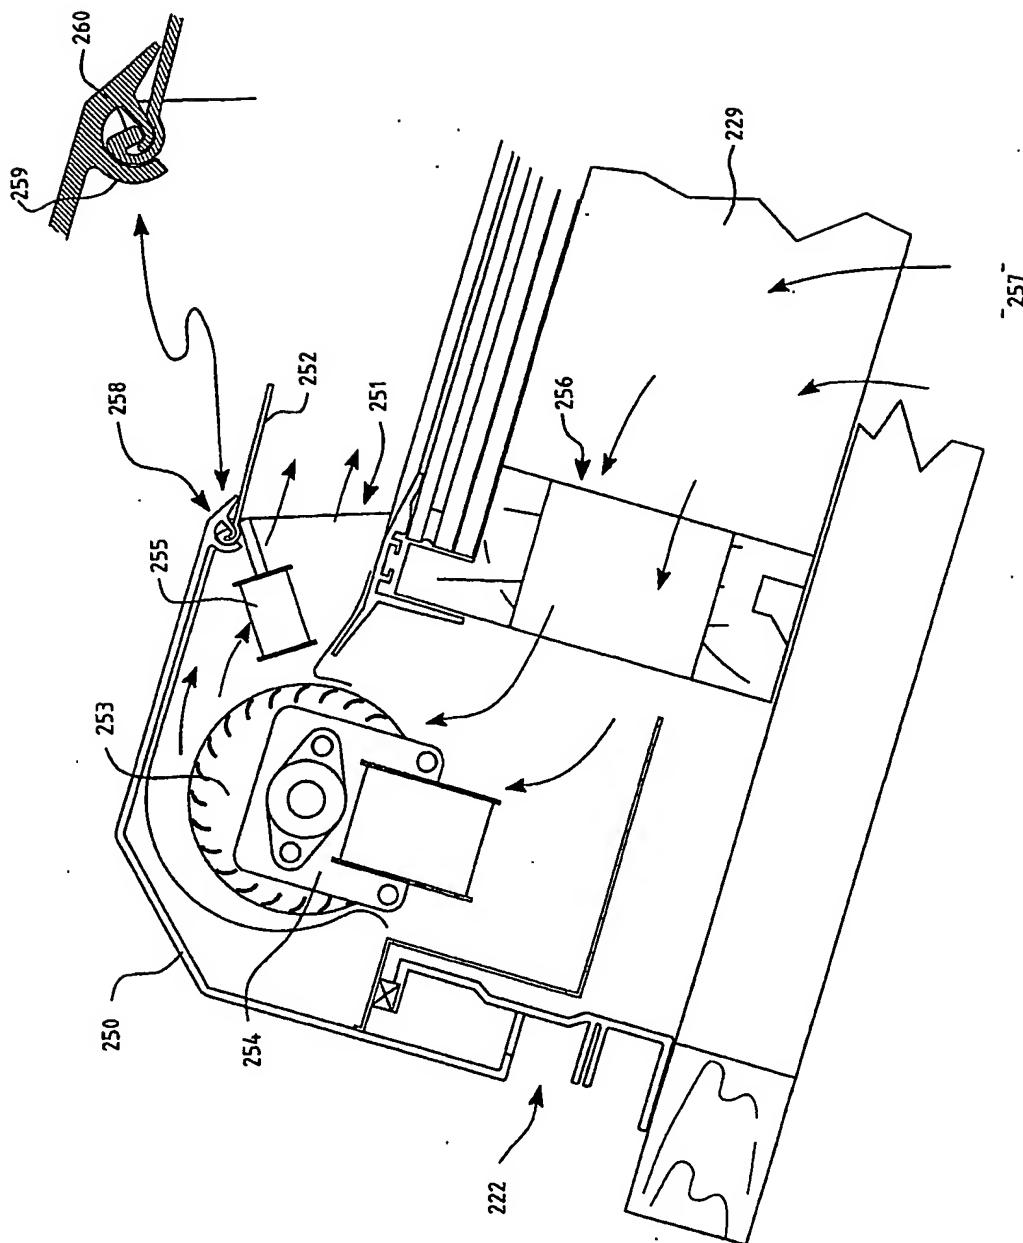


Fig. 8

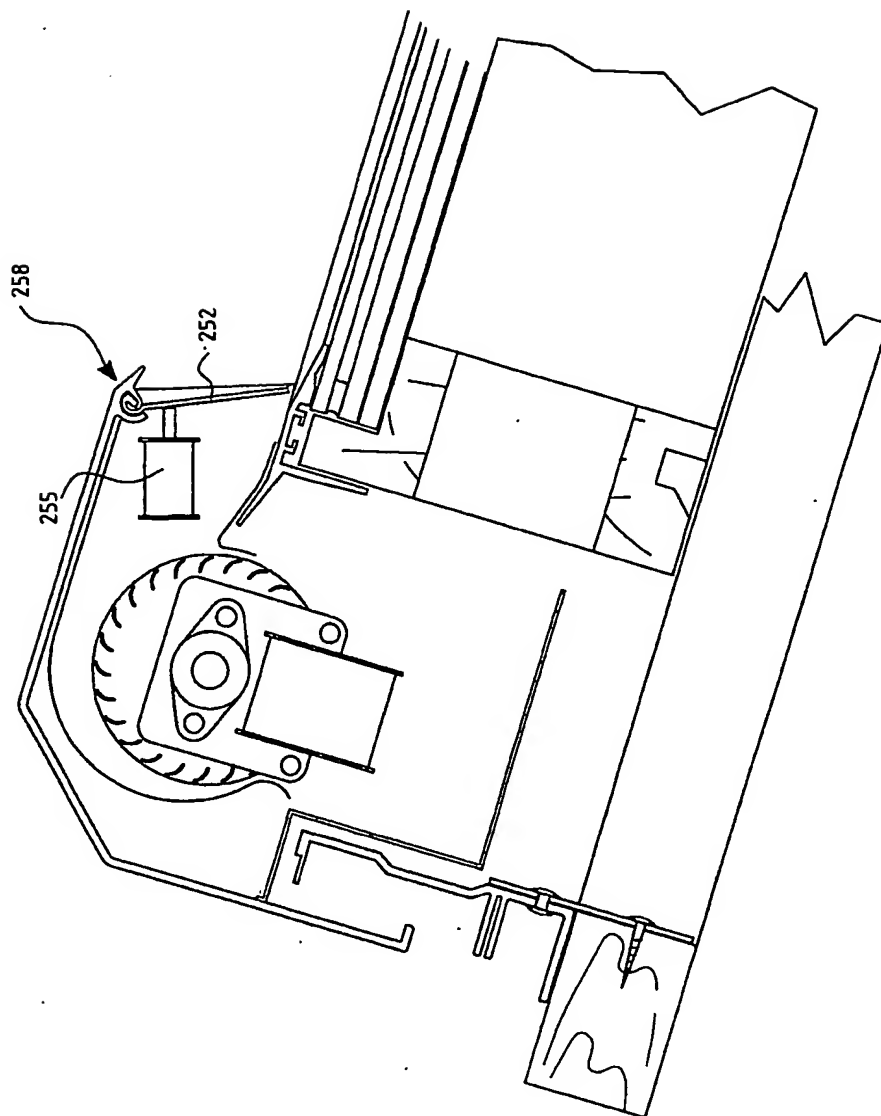


Fig. 9

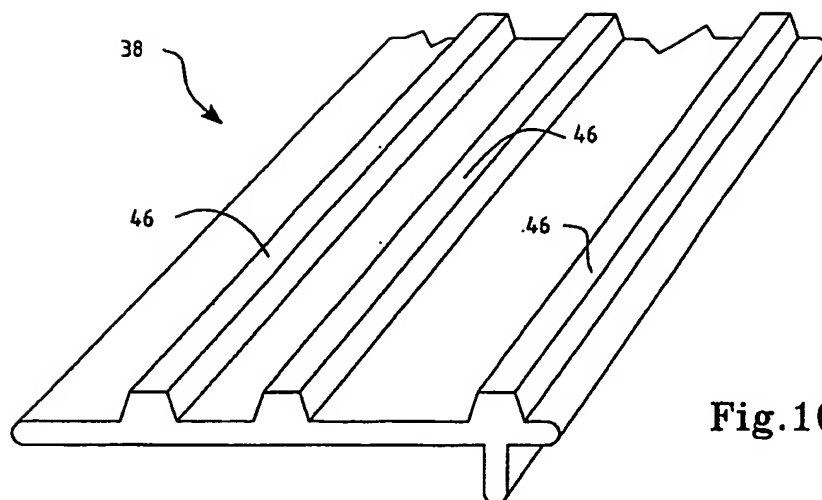


Fig.10 A

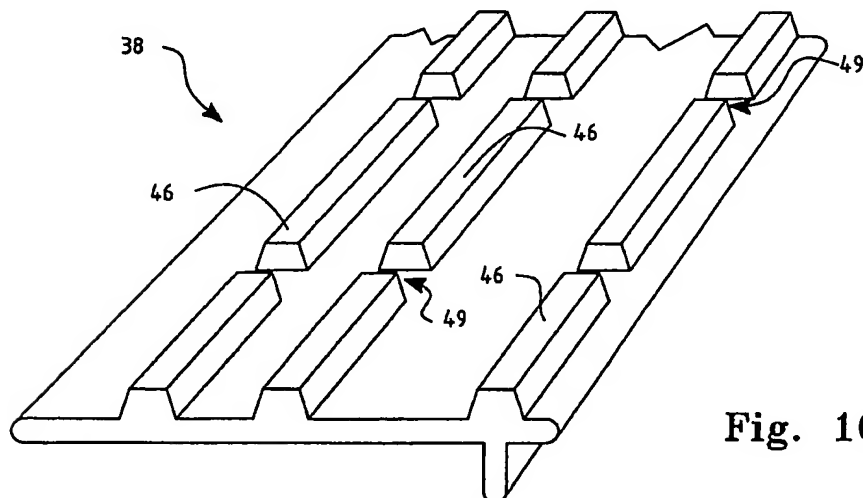


Fig. 10B

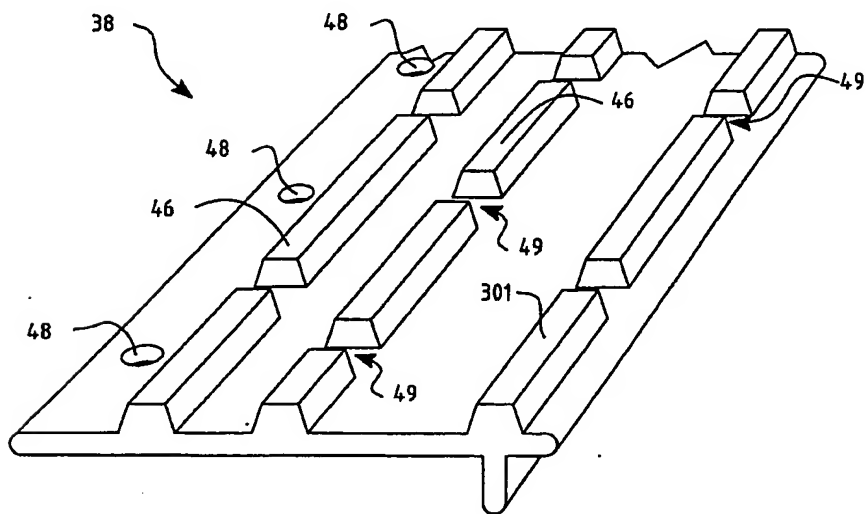


Fig. 10C



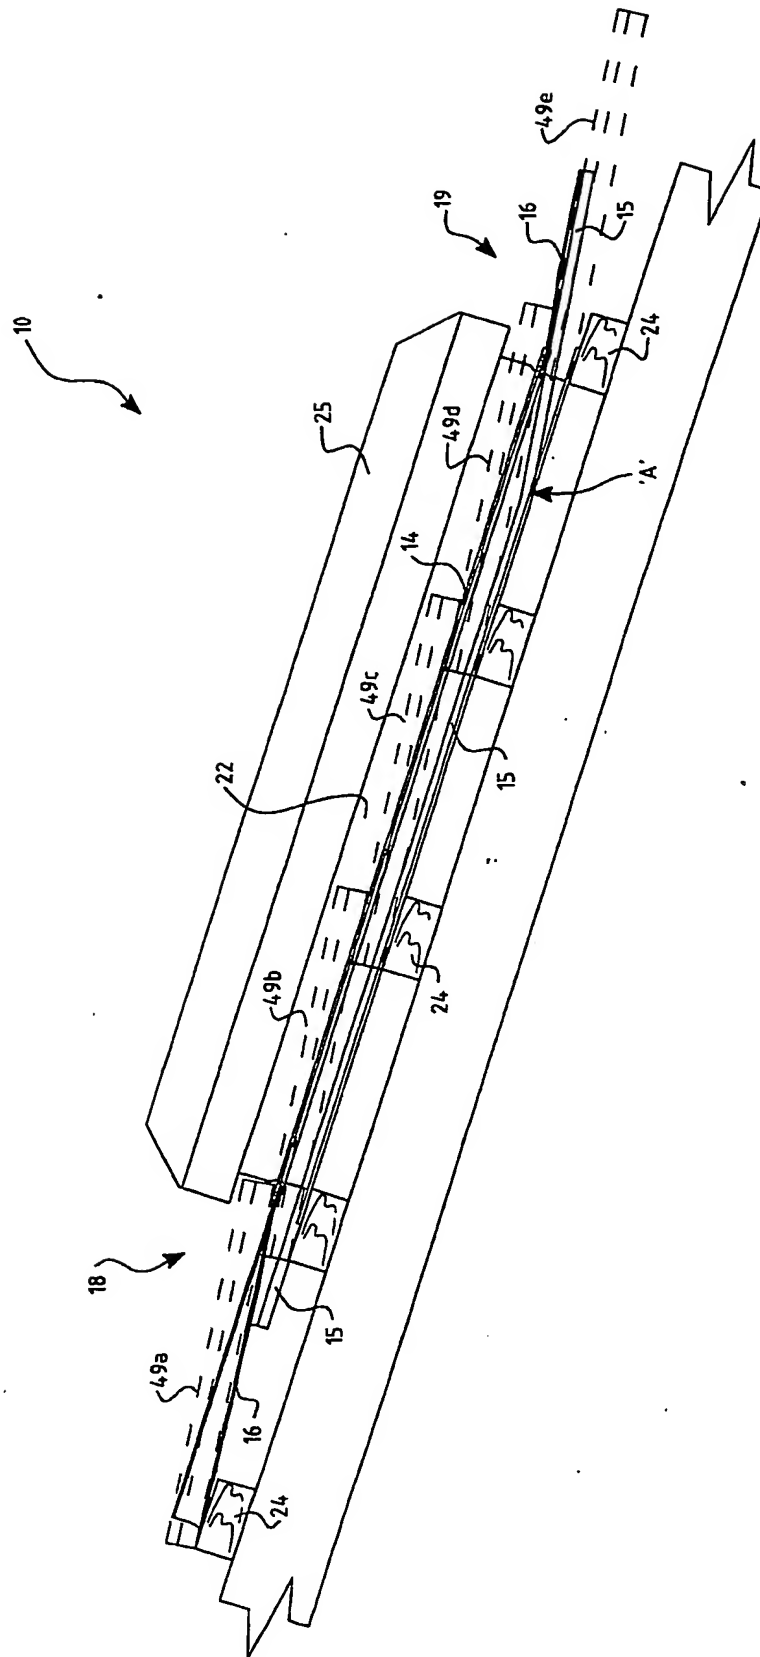


Fig. 11

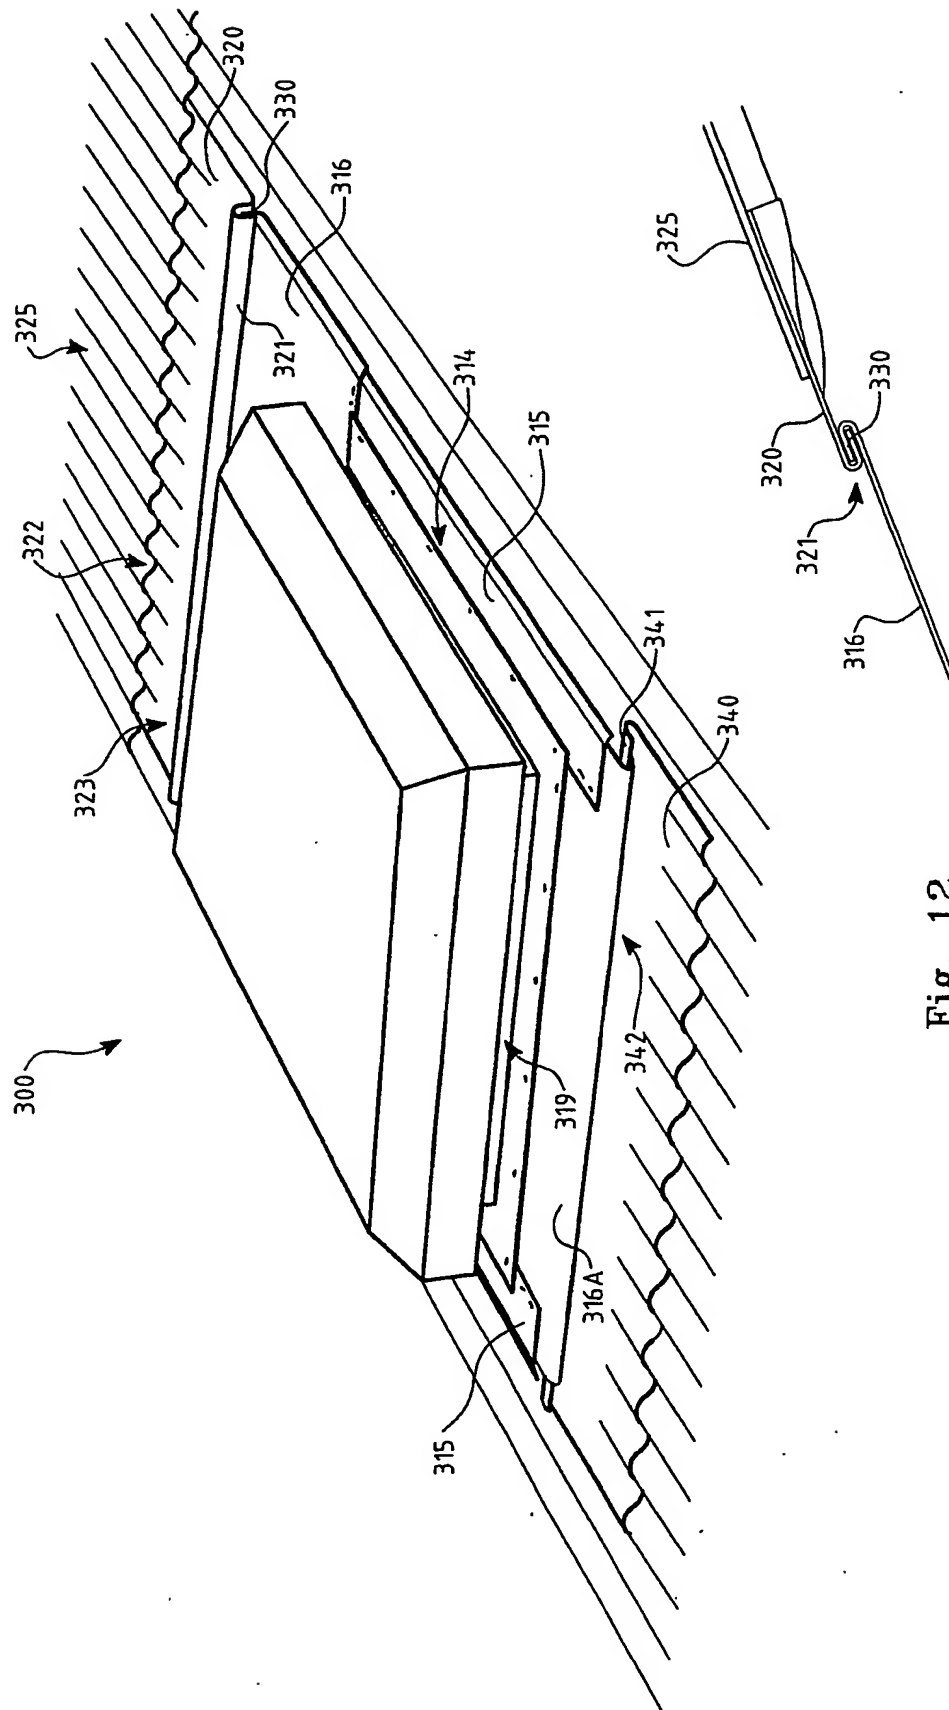


Fig. 12

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU2003/001481

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>				
Int. Cl. <sup>7</sup> : E04D 13/03				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b>				
Minimum documentation searched (classification system followed by classification symbols)				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI + keywords(skylight,frame,extrude,seal,flash,hinge,vent,clip etc.)				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 4930275 A (VERBY et al.) 5 June 1990	1: 3,5,9,11,13,15 ,35-38		
X	DE 3904174 A1 (HANDEL & MACK GMBH) 16 August 1990	1,2,6,31-34		
X	EP 0277497 B1 (VEREINIGTE ALUMINIUMWERKE AG) 15 May 1991	1,2,6,31-34		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex				
<p>* Special categories of cited documents:</p> <table style="width: 100%;"> <tr> <td style="width: 50%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 50%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> </td> </tr> </table>			<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>			
Date of the actual completion of the international search 17 March 2004		Date of mailing of the international search report <b>22 MAR 2004</b>		
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  <b>JONATHAN MILLS</b> Telephone No : (02) 6283 2113		

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2003/001481

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4776141 A (POWELL) 11 October 1988	1,2,3,5
X	US 4928445 A (SAMPSON et al.) 29 May 1990	1- 6,9,11,13,15,2 8-30
X	US 5207036 A (SAMPSON et al.) 4 May 1993	1- 3,5,9,11,13,15 18-21,28-30
X	US 5553425 A (SAMPSON et al.) 10 September 1996	1- 3,5,7,8,9,11,1 3,15
X	GB 1429675 A (BOGAERT) 24 March 1976	1,2,29,30
X	EP 0207723 B1 (WASCO PRODUCTS, INC.) 15 April 1992	1- 6,9,11,13,15,3 5-38
X	WO 1998/22681 A1 (V. KANN RASMUSSEN INDUSTRI A/S) 28 May 1998	1- 3,5,9,11,13,15 28-30
X	US 4862657 A (JENTOFT et al.) 5 September 1989	1-3,5,7- 9,11,13,15,18- 21
X	AU 89567/98 A (THIRTIETH ACOL PTY LTD TRADING AS STATEWIDE SKYLIGHTS) 20 May 1999	1-3,35-38
X	AU 77188/87 A (MITCHELL) 25 February 1988	1,22,23
A	AU 34480/84 A (MMI NOMINEES PTY LTD) 3 October 1985	27

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2003/001481

## Box I Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos :

because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos :

because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos :

because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

## Box II Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Claims 1 and 2 have been found to lack novelty in light of many documents. Consequently the number of features introduced in the independent claims appended to these claims means that, A Posteriori, there are many separate inventions claimed. However the claims appear to broadly cover the following inventive concepts:

1. Claims 3-6,31-38 deal with flashing.
2. Claims 7-21 deal with frames, clips and hinges.
3. Claims 22-27 deal with ventilation.
4. Claims 28-30 deal with sealing strips.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims

2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2003/001481

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	4930275				
DE	3904174				
EP	0277497	DK	551888	HU	48937
				US	4966819
US	4776141				
US	4928445	CA	2005251	CA	2127560
		US	4987705	US	4995208
		WO	9007035	US	4926594
				US	5044133
US	5207036				
US	5553425	CA	2163077		
GB	1429675	BE	780938	DE	2313160
		JP	49055118	US	3983669
EP	0207723	JP	62017255	US	4589238
		US	4703592	US	4896468
				US	4702049
WO	9822681	AU	50478/98	CA	2270535
		EP	0948692	HU	0000087
				DK	131696
US	4862657	CA	1196763	US	4449340
				US	4570394
AU	8956798	AU	89567/98		
AU	7718887	AU	77188/87		
AU	3448084	AU	34480/84		
END OF ANNEX					